






BILL OF STEEL

BARS	LOCATION	SIZE	NO. REQ'D	BENDING DIMENSIONS				LENGTH
				A	B	C	D	
B490E	MEDIAN (WHEN REQ'D.)	4	48					2'-8"
A490	SLAB	4	8					▲
A690	SLAB	6	▲					12'-0"
A691	SLAB	6	▲					23'-8"
A692	SLAB	6	31					▲
H490	FOOTING	4	▲	6"	1'-4"			3'-4"
L490	FOOTING	4	▲	2'-7 1/4"	1'-0"	8"		7'-6 1/2"

▲ THESE NUMBERS VARY DEPENDING UPON ROADWAY WIDTH.

PROJECT NO.	YEAR	SHEET NO.
	1995	

REVISIONS			
NO.	DATE	BY	BRIEF DESCRIPTION
1	5-1-95	CMH	GENERAL REVISION REDESIGN
2	12-18-95	CMH	ADDED BARS A490 AND JOINT DETAIL
3	4-28-97	CMH	REVISED JOINT DETAILS AND NOTE
4	9-6-99	CMH	REVISED JOINT NOTE
5	7-31-00	CMH	REVISED JOINT DETAILS, NOTE, LIMITS OF PIPE AND ADDED NOTE #3
6	4-8-05	JHW	ADDED NOTE
7	8-8-08	JHW	REVISED JOINT DETAILS AND NOTE AND ADDED CONSTRUCTION DETAIL
8	6-1-11	WJS	REVISED JOINT DETAILS AND NOTE
9	3-26-14	WJS	REVISED JOINT DETAILS AND NOTES.

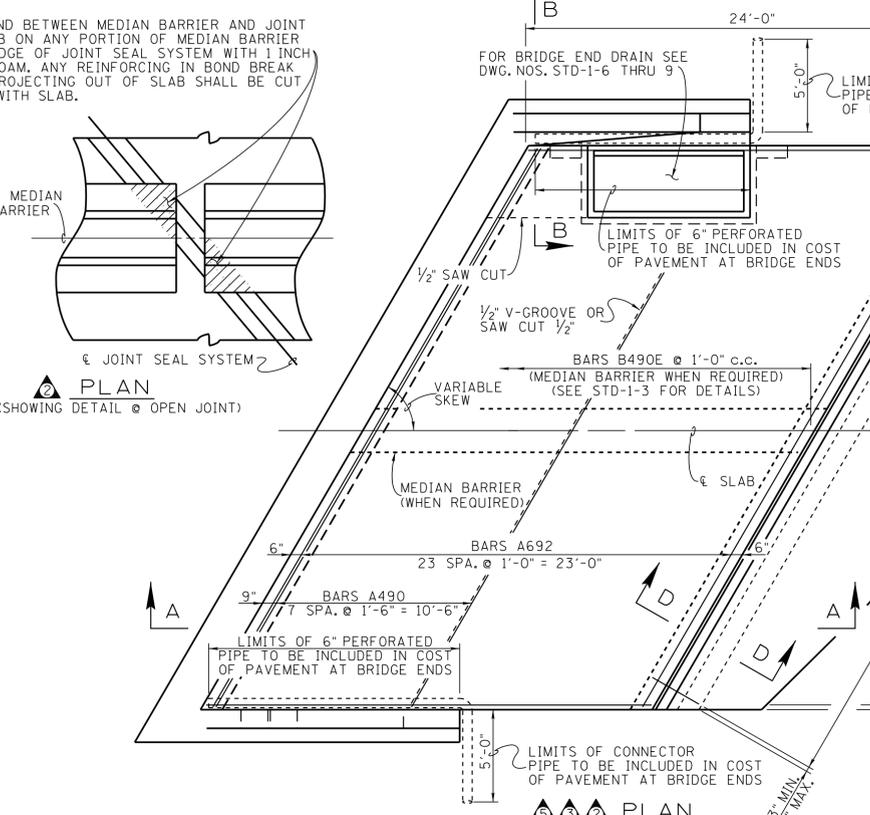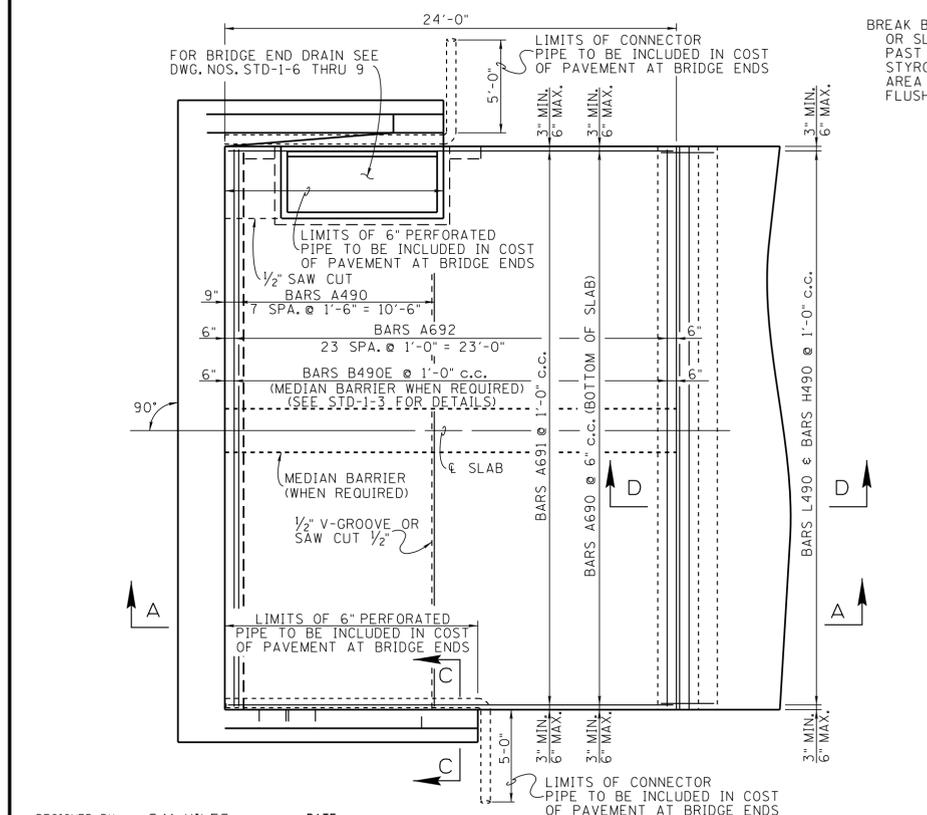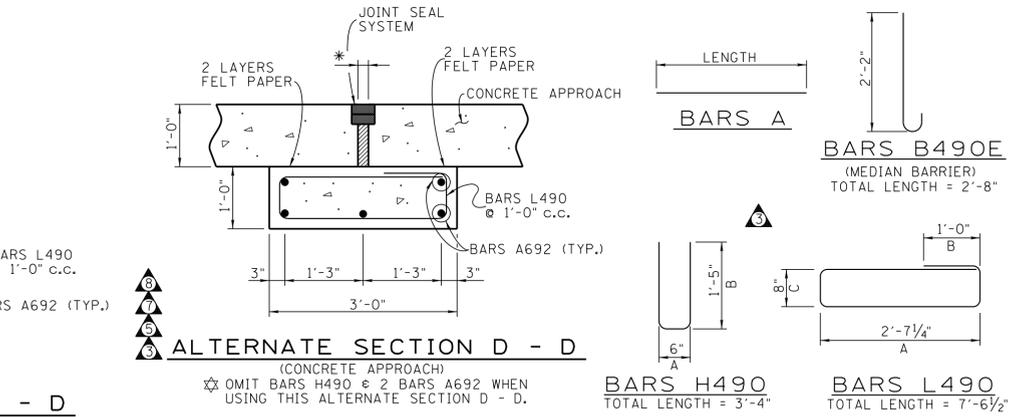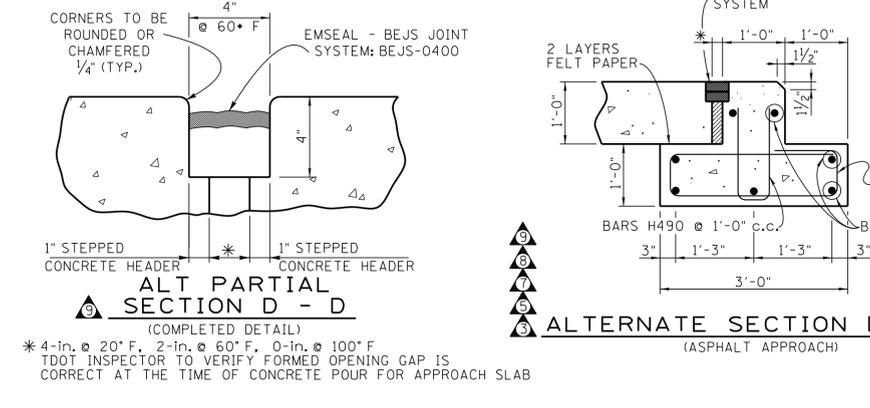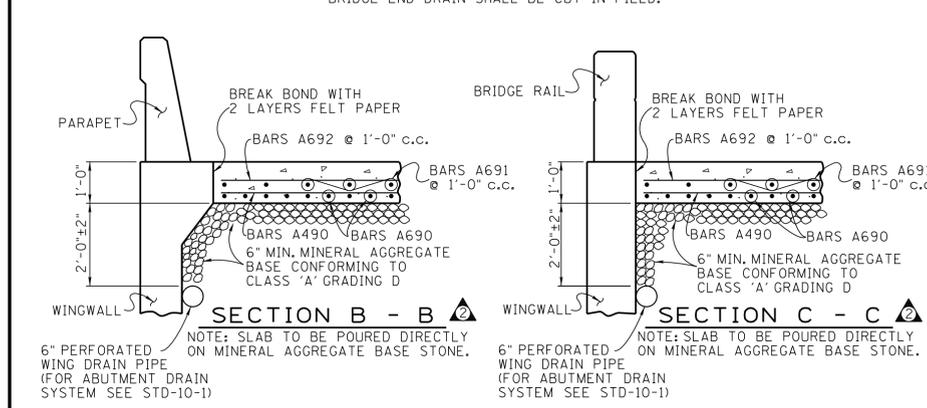

- NOTES**
- QUANTITIES FOR CLASS 'A' CONCRETE, REGULAR AND EPOXY COATED REINFORCING STEEL (WHEN REQUIRED FOR MEDIAN BARRIER), STYROFOAM, GRATE AND MISCELLANEOUS MATERIALS FOR BRIDGE END DRAIN, WHEN REQUIRED, ARE TO BE INCLUDED IN PAVEMENT AT BRIDGE ENDS, S.Y. FOR BAR BENDING DIMENSIONS SEE THIS SHEET AND BILL OF STEEL FOR BRIDGE END DRAIN ON DRAWING NO. STD-1-6.
 - COST OF MINERAL AGGREGATE CLASS A GRADING D BASE QUANTITY SHALL BE INCLUDED IN COST OF PAVEMENT AT BRIDGE ENDS. CLASS B GRADING C OR D MAY ALSO BE USED.
 - NOTE: TOP OF SLAB AND TOP OF END BEAM TO CONFORM TO ROADWAY SLOPE AND GRADE.
- GENERAL NOTES**
- CONCRETE: TO BE CLASS 'A' (f'c = 3,000 psi)
 REINFORCING STEEL: SHALL BE ASTM A615 GRADE 60 UNLESS NOTED OTHERWISE. SEE SECTION 604 AND 907 OF THE STANDARD SPECIFICATIONS. SPECIFICATIONS: STANDARD ROAD AND BRIDGE SPECIFICATIONS OF THE TENNESSEE DEPARTMENT OF TRANSPORTATION (CURRENT EDITION).
 NOTE: THE APPROACH SLAB SHALL NOT BE POURED UNTIL THE ADJACENT END SPAN DECK SLAB IS IN PLACE AND ACCEPTED BY THE ENGINEER.
 NOTE: THE APPROACH SLAB CONTROL ELEVATIONS SHALL BE ADJUSTED, (IF REQUIRED), TO MATCH THE IN PLACE DECK SLAB IN BOTH TRANSVERSE AND LONGITUDINAL DIRECTIONS.
- JOINT SEAL SYSTEM:**
 THE EXPANSION JOINT SYSTEM USED SHALL BE ON THE TDOT APPROVED QUALIFIED LISTS FOR ACCEPTABLE PRODUCTS. THE JOINT SYSTEM SHALL BE INSTALLED UNDER THE DIRECT SUPERVISION OF AN AUTHORIZED TECHNICIAN PROVIDED BY THE EXPANSION JOINT SUPPLIER. FOR EACH JOINT AT EACH BRIDGE AND FOR EACH BRIDGE LOCATION WITHIN THE PROJECT, THE TECHNICIAN MUST APPROVE ALL ASPECTS OF THE GEOMETRY AND PREPARATION, INCLUDING GRINDING AND/OR GROOVING, PRIOR TO ANY JOINT MATERIAL INSTALLATION.
- NOTE: THE JOINT SEAL SYSTEM IS NOT REQUIRED WHEN THE BRIDGE HAS AN EXPANSION JOINT AT THE ADJACENT ABUTMENT.

DESIGNED BY C.M. HILES
 DRAWN BY KIM FRANKENFIELD
 SUPERVISED BY C.M. HILES
 CHECKED BY

DATE 4-95
 DATE 4-95
 DATE

PLAN (90° SKEW)

CORRECT *Edward P. Wasserman*
 ENGINEER OF STRUCTURES

MINOR REVISION - FHWA APPROVAL NOT REQUIRED
 STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION
REINFORCED CONCRETE PAVEMENT AT BRIDGE ENDS
 1995