


- REV. 4-13-11: ADJUSTED CROSSWALK MARKINGS, ADDED TYPE 2 SIDEWALK DIMENSION, MISC. EDITS TO DRAWING.
- REV. 5-8-13: REVISED TITLE FOR TERMINOLOGY.
- REV. 6-4-13: REVISED NOTE (C) AND (D), CHANGED TITLE.
- REV. 1-15-14: REMOVED ALTERNATE, REMOVED NOTE (C), ADDED NOTE (C).
- REV. 2-5-16: RENAMED TITLE, REMOVED ALTERNATE. MINOR DRAFTING EDITS.

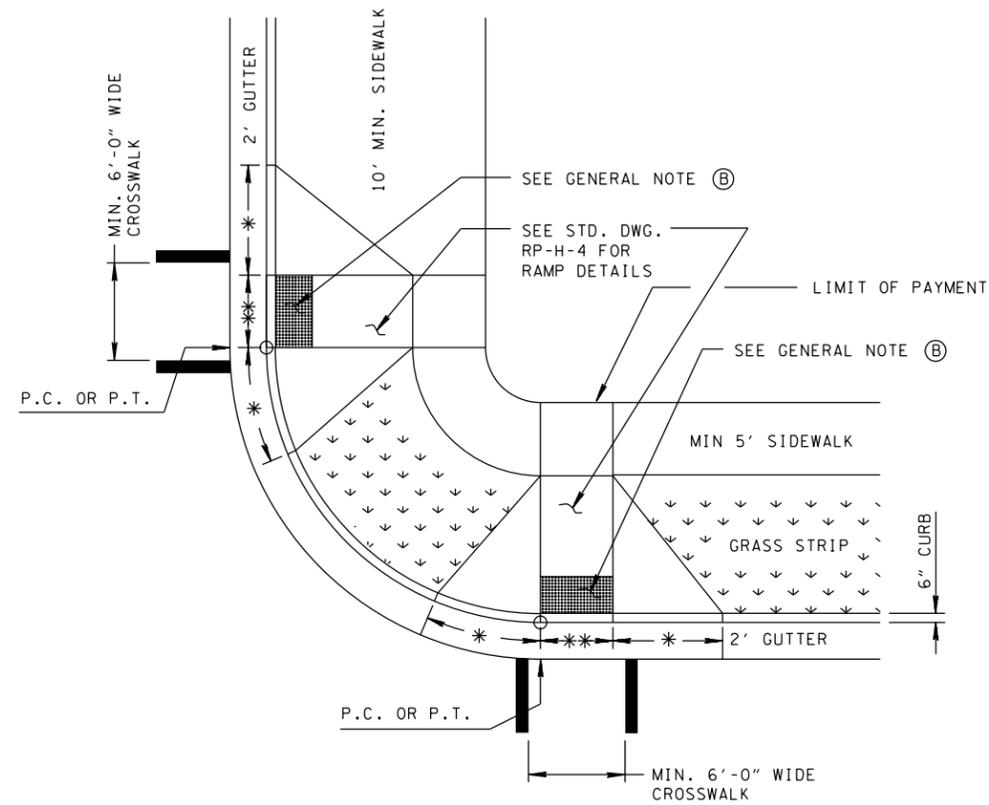

RAMP OUTSIDE RADIUS (WITH GRASS STRIP OR WIDE SIDEWALK)

* DIMENSION VARIES RELATIVE TO LONGITUDINAL ROADWAY GRADE
 ** 4'-0" MINIMUM REQUIRED

GENERAL NOTES	
(A)	FOR SIGNALIZED INTERSECTIONS THAT REQUIRE PEDESTRIAN SIGNAL PUSH BUTTONS, REFER TO CHAPTER 4 OF TDOT TRAFFIC DESIGN MANUAL FOR PLACEMENT DETAILS.
(B)	SEE STANDARD DRAWING RP-H-3 FOR TRUNCATED DOMED SURFACE DETAILS.
(C)	SIDEWALK WIDTH SHALL NOT INCLUDE 6" CONCRETE CURB.
(D)	GRATES FOR STORM DRAINS SHALL NOT BE PLACED IN THE CROSSWALK OR IN FRONT OF THE CURB RAMP.
(E)	IF THE RAMP AND LANDING CAN NOT BE CONSTRUCTED DUE TO LIMITED RIGHT-OF-WAY USE PARALLEL RAMP INSTEAD.

□ MINOR REVISION -- FHWA APPROVAL NOT REQUIRED.

**STATE OF TENNESSEE
DEPARTMENT OF TRANSPORTATION**

PERPENDICULAR
CURB RAMP
PLACED
OUTSIDE CURVE

1-15-07 RP-H-8